


Rollerless hoisting chains

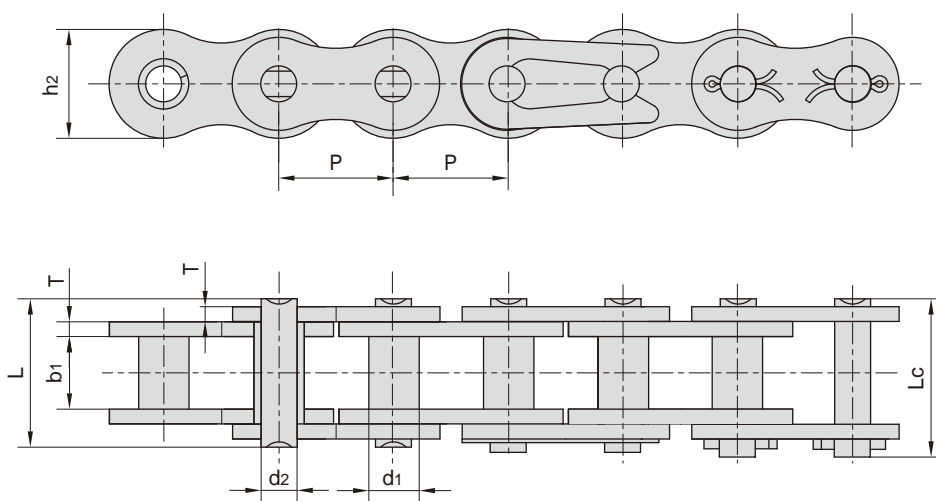

| 东华链号 Donghua Chain No. | 节距 | 套筒直径 | 内节内宽 | 销轴直径 | 销轴长度 | | 内链板高度 | 链板厚度 | 抗拉强度 | 平均抗拉强度 | 每米长重 |
|------------------------------|--------|---------------|---------------------------|--------------|-------|--------|-------------------|-----------------|------------------|--------------------------|------------------|
| | Pitch | Bush diameter | Width between innerplates | Pin diameter | L | Lc | Inner plate depth | Plate thickness | Tensile strength | Average tensile strength | Weight per meter |
| | P | d1 max | b1 min | d2 max | L max | Lc max | h2 max | T max | Q min | Q ₀ | q |
| | mm | mm | mm | mm | mm | mm | mm | mm | kN/lbf | kN | kg/m |
| 45-1 | 12.700 | 5.63 | 7.85 | 3.96 | 16.6 | 17.8 | 12.00 | 1.50 | 14.10/3205 | 17.5 | 0.54 |
| 55-1 | 15.875 | 7.03 | 9.40 | 5.08 | 20.7 | 22.2 | 15.09 | 2.03 | 22.20/5045 | 29.4 | 0.83 |
| 65-1 | 19.050 | 8.33 | 12.57 | 5.94 | 25.9 | 27.7 | 18.00 | 2.42 | 31.80/7227 | 41.5 | 1.22 |
| 85-1 | 25.400 | 11.10 | 15.75 | 7.92 | 32.7 | 35.0 | 24.00 | 3.25 | 56.70/12886 | 69.4 | 2.16 |
| 105-1 | 31.750 | 13.60 | 18.90 | 9.53 | 40.4 | 44.7 | 30.00 | 4.00 | 88.50/20114 | 109.2 | 3.31 |
| 125-1 | 38.100 | 15.60 | 25.22 | 11.10 | 50.3 | 54.3 | 35.70 | 4.80 | 127.00/28864 | 156.3 | 4.97 |
| 145-1 | 44.450 | 18.00 | 25.22 | 12.70 | 54.4 | 59.0 | 41.00 | 5.60 | 172.40/39182 | 212.0 | 6.50 |
| 165-1 | 50.800 | 20.00 | 31.55 | 14.27 | 64.8 | 69.6 | 47.80 | 6.40 | 226.80/51545 | 278.9 | 8.70 |